


Lion 15 wheel loader

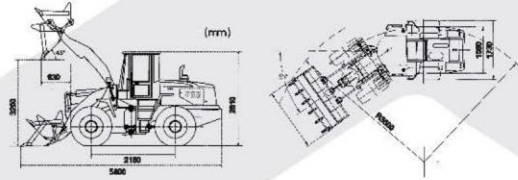

性能参数 SPECIFICATIONS

斗容 Bucket capacity 0.7m³
 额定载重量 Rated load 1500kg
 外形尺寸 Transportation dimension
 长 × 宽 × 高 (L × W × H) 4850 × 1750 × 2650mm
 轴距 Wheelbase 2150mm
 轮距 Thread 1400mm
 最大掘起力 Max. breakout force 43KN
 最大卸载高度 Max. dumping height 2750mm
 卸载距离 Dump distance 680mm
 三项和时间 Total time 13s
 整机操作质量 Operating weight 3000kg

发动机 Engine

型号 Model XINCHAI A498T1 or QJANCHAI 4B2-52M22
 (Inline, Water Cooling, Dry)
 额定功率 Rated power 37kw/38kw
 最大扭矩 Max. torque 186N.m

传动系统 Torque converter and transmission system

变矩器型号 Model of torque converter YJ240
 型式 Pattern 单级三元件 3-element single stage
 变速箱型式 Transmission type Full-powershift, countershaft type
 档位数 Number of gear 前二后二 2 forward, 2 reverse
 最高车速 (行驶) Max. travel speed 25km/h

注: 产品配置、颜色、规格参数变更恕不另行通知, 以实物为准。

Note: Assembly to be matched on the products, color, specifications and data are subject to change without notice.

驱动桥 Axle

前后驱动桥 Axle 五十铃桥

轮胎 Tire

轮胎规格 Tire Size 12-16.5

转向系统 Steering system

型式 Pattern 铰接全液压转向 Articulated and hydraulic steering
 最小转弯半径 Min. turning radius(outside of bucket) 5700mm
 最大转向角 Max. turning angle 27° ± 1

工作液压系统 Hydraulic system

工作泵型号 Implant pump CBGV2100
 系统工作压力 System working pressure 16MPa
 分配阀型号 Distribution device model DF25.2C

制动系统 Brake system

行车制动形式 brake type oil disc brake on four wheel
 停车及紧急制动 Parking brake type
 软轴操纵外束型鼓式 Soft axle control, outside bunch drum type

快换装置 Hydraulic quick coupling device

Company: QINGZHOU LION HEAVY INDUSTRY CO.,LTD

Address: longquan community, mihe town, qingzhou, shandong province, china

Wechat/whatsapp: +8615063630414

Email: info@lionheavyindustry.com

Website: www.lionheavyindustry.com

Facebook: https://www.facebook.com/lionheavy/